



About Us

Starshine Lights is a global leader in professional stage light and laser lighting solutions, delivering cutting-edge performance for concerts, events, and venues. Visit us at www.starshinelights.com

► www.starshinelights.com



Contact Us

+86 135 2139 1704



Our Website

www.starshinelights.com



Our Address

Sanzi Enterprise, Fengxiang
North Road, Baiyun District,
Guangzhou



STARSHINE
— LIGHTS —

LIGHT UP DREAM SHOW

www.starshinelights.com



YA065
380W BSW 3in1 Beam Spot Wash



YA071/YA073/ YA072
350W/380W/480W
Waterproof Beam/BSW



Technical Parameter

Input voltage: AC90V-220V 50Hz -60 Hz	Strobe beat and strobe: fast action strobe beat can quickly interrupt the beam, and can realize 1-10 times per second strobe effect in addition to dimming effect
Light source: 380W Rated power: 500W	Zoom: electronic linear zoom system, zoom 2-40 degrees, with linear zoom zoom: zoom in and out electronic focus at 20M
Light source life: 1500-1800 hours	Motor: Built-in microprocessor-controlled precision stepper motor composition
Color temperature: 6000-8000K	Control: microprocessor: the use of high stability and anti-interference ability of the CPU
Control channel: 20CH	Digital control: DMX512
Color: 9 colors + white light effect, variable continuous, rotating color plate can produce rainbow effect in any direction	Fan: DC12-24V fan, air cooling speed natural, fan cooling and overheating protection adjustable strobe frequency
Prism: the best effect prism, a rotating 4 prism, a 16 prism can be rotated in the positive and negative direction and has a prism positioning function.	Pan 540° , Tilt 270° , both with micro-step precision
The prism can be rotated in any direction.	Working environment: Indoor, -20°C ~ 50°C
A magnifying lens, a focusing lens	Shell: high-strength temperature-resistant engineering plastic shell and metal powder coating technology, streamlined appearance design
Gobo plate:	Lamp body size: 33cm*24cm*61cm
A rotating gobo plate : 7 gobos+ white light	Package size: 67cm*33*41cm, N.W.: 16KG, G.W.: 19KG
A fixed gobo plate , 13 gobos+ white light	
LCD display	
Focusing, touch with rotating display	
Optics: combined optical lenses	

Technical Parameter


Input voltage : AC90V-220V	Strobe: dual motor independent strobe effect, 0.5-20 times / sec, speed adjustable
Frequency: 50Hz -60 Hz	Dimming: 0%-100% linear dimming, smooth and flicker-free
Rated power : 450W/500W/550W	Rotation angle: Pan 540° , Tilt: 270° with automatic return function
Light source: 350W/380W/480W	Channel: 16 channels
Color temperature: 6000-8000K	Mounting bracket / base adjustment angle: adjustable irradiation angle
Control: DMX512 18CH Protection grade: IP65	Working Temperature: Ambient temperature: -20°C ~ +40°C
Color plate: 14 +1 colors, atomization function	Product size: 37cm*33*66cm
Gobo plate: 13 fixed gobos+1 white light	Packing size: 81cm*44cm*56cm
Prism plate: 1pcs 8 prisms, 1pcs 16 prisms can be independent bidirectional rotation	Net weight: 25KG
Angle: 0-2° Focus: electronic focus	Gross weight: 28KG



YA052/ YA053 / YA051
Mini 295W/260W/230W
Moving Beam



YA023/ YA010
295W /350W Ultra Prism Beam
(2 prism plate ,7 prism effect)

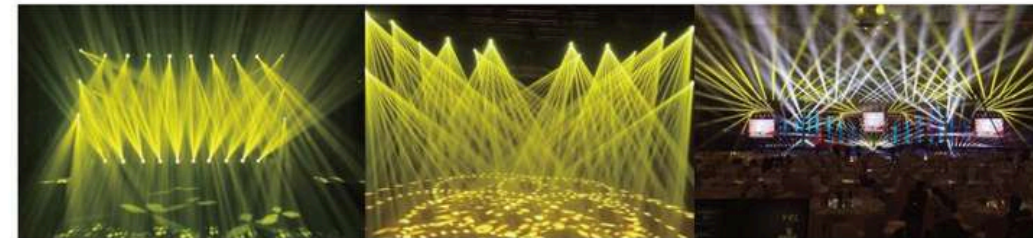

Technical Parameter

Input voltage: AC90V~220V 50Hz ~60 Hz	Adoption of photoelectric reset system, when the occasional malfunction, can automatically retrieve the reset
Light source: 295W/260W/230W	Horizontal 540° , resolution 8Bit/16Bit
Rated power: 450W/400W/350W, more lightweight and convenient in the same power	Vertical 270° , resolution 8Bit/16Bit
Channel: 16CH	Overheating protection
Control effect: DMX512, self-propelled built-in program, Sound	IP protection level: IP20
Luminous flux of 15000lm, color temperature up to 7500K	Electronic ballast and AC/DC switching power supply.
Gobo plate: 13 gobos+ 1 white, dithering, running water effect	Power factor as high as 0.99, THD <20%.
Color plate: 14 colors + white light	Support bulb power adjustment, bulb power consumption is automatically reduced by 50%, extend bulb life, improve lamp stability.
Strobe: 1~11 times / sec	Display support energy-saving mode, Chinese and English convertible
Prism: a prism : 8 + 16 + 24 prisms can be rotated function	Product size: 28cm*22cm*46cm
0~100% mechanical dimming	Package size: 54cm*30cm*38cm
Focus: electric focus, beam angle 0~4	Net weight: 10KG,Gross weight: 12KG
Seven colors effect+ fog effect	

Technical Parameter


Input voltage: AC90V~220V 50Hz ~60 Hz	Beam angle adjustable range;
Light source: 295W/350W	Optical lens: 152MM high transmittance of the front group of lenses; light spot uniformity and the edge and the center of the circle brightness area difference of no more than 50%, the Full, sharp, superior sense of light.
Rated power: 400W/450W	Lens group optical system, motorized focus.
Color temperature: 6000~8000K	Beam angle 3.8° ~45° linearly adjustable;
Lifespan: 1500~1800 hours	Adoption of photoelectric reset system, when the occasional malfunction, it can automatically retrieve the reset;
Control channel: 18CH	Pan540° ,Tilt 270° , resolution 8Bit/16Bit;
Power supply: high efficiency and reliable switching power supply	Overheating protection;
Color plate: a color plate, consists of 13 color chips + white light	Control mode: DMX512/master-slave/automatic/support RDM function;
Gobo plate: 10 pattern effects + water pattern effects	Protection grade: IP20;
Effect plate: 2 prism plate composed of 4 prisms, prisms can be stacked out of 7 kinds of prism effects.	Product size: 33cm*26cm*51cm
(a 16 prisms, a 8 + 16 prisms, a triple 8 + 16 + 24 prisms , a 24 prisms)	Package size: 44cm*41cm*54cm
A fogging mirror, a colorful mirror	Net weight: 16KG
Dimming: 0~100% electronic dimming;	Gross weight: 18KG
Strobe: support mechanical strobe and adjustable strobe effect, support strobe macro function;	



YA096
400W LED BSW 3in1
Beam Spot Wash



YA091
300W/200W LED Moving Beam

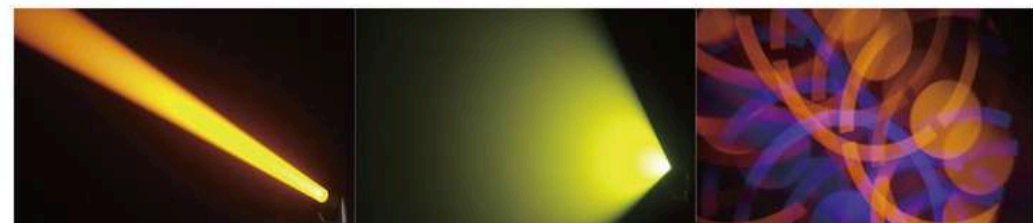

Technical Parameter


Input voltage: AC90V-220V Frequency: 50Hz -60 Hz
 Light source: 400W white LED module, Rated power: 600W
 Lamp life: 20000 hours, Lumen illuminance: 4 meters 120,000 lm
 Output caliber: 138MM, Channel mode: 26 channels
 Color temperature: 9000K Color rendering index: Ra ≥ 90
 Color: 8 colors + white light. Color half-color function
 CMY color mixing system: infinite color mixing
 CMY + CTB + CTO + color plate
 Fixed gobo plate: 12 fixed gobos + white light
 Rotating gobo plate: 7 glass gobos, each glass pattern can be independently forward and reverse rotation
 Prism system: standard single 3 prisms and 8 prisms, each prism can be independently positive and negative rotation
 Macro function: console reset function, self-propelled mode, master-slave mode
 Dimming system: 0-100% linear adjustment
 Focusing system: linear adjustment from 4 meters to 50M
 Fogging system: 1 independent fogging effect, soft and natural light spot
 Zoom angle: beam for 2.7 to 36° coloring 4-36° pattern 4-36°

High-speed strobe: 0-30 times / sec. Adjustable speed strobe effect. Strobe macro function
 Horizontal scanning: 540 degrees (16bit precision scanning)
 Electronic error correction
 Vertical scanning: 270 degrees (16bit precision scanning)
 Electronic error correction
 Display: LCD, key + touch dual operation mode
 Control signal: international standard DMX512. with RDM function, online software upgrade, dial address code
 Cooling mode: with axial fan to strengthen the cooling
 Safety device: with electronic temperature control overheating protection, overheating system failure electronic temperature control automatic power-off protection
 Appearance material: high temperature plastic
 Working environment: -20 degrees, 40 degrees
 Protection grade: IP20, Product size: 38*27*65CM (L*W*H)
 Packing size: 54*45*61CM, Net weight: 22.5KG
 Gross weight: 25KG
 Size of flight case: 73*50*88CM
 Total weight of flight case: 77KG

Technical Parameter

Input voltage: AC90V-220V 50Hz -60 Hz
 Rated power: 300W/400W
 Light source: LED module 300W/200W
 Control channel: 16CH
 Color temperature: 8000K
 Output caliber: 160°
 Function:
 Color plate: 12 colors + white light
 Gobo plate: 15 gobos + white light, with pattern jitter, one-way running water, adjustable speed, any positioning function
 a seven-color, a fogging
 Prism plate: an 8 prism, a honeycomb 48 prisms, can be rotated in the positive and negative direction, has a prism positioning function
 Motor positioning precision, Dimming: 0-100 dimming
 Strobe: ultra-fast speed strobe

Display: LCD liquid crystal screen, Chinese and English bilingual operating system
 Optics: Combined lens, zoom 0-3.9°, electronic focus 20M
 Horizontal scanning: 540 degrees (16bit precision scanning)
 Vertical scanning: 280 degrees (16bit precision scanning) with automatic return function.
 Control mode: international standard DMX512 signal, RDM function, 3-core, 5-core DMX512, thermal protection.
 Strobe: double-chip strobe 0.5-14 times / S, with synchronous, asynchronous, random strobe mode, speed adjustable
 Product size: 34cm*27cm*56cm
 Package size: 58cm*46cm*42cm
 Net weight: 15KG
 Gross weight: 17KG

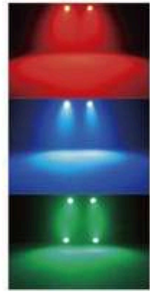

YE046B
54pcs LED Par Light

Input voltage: AC90V-220V 50Hz -60 Hz Rated power: 200W
 Light source: 54x3W lamp beads (R12, G18, B18, W6), Light source life: 6-10 million hours
 Color: RGBW induction color mixing into a variety of colors, built-in macro function (0-100% saturation adjustable)
 LED angle: 15°, 25°, 45° (optional), Control: DMX512, master-slave control, self-propelled, Channel: 8CH
 Display: call a variety of scenes, the built-in program can be directly called to execute.
 Color temperature correction: 3200K - 7200K linear adjustment.
 Strobe: independent electronic strobe 1-25Hz, can be random strobe, pulse strobe, synchronous asynchronous strobe, monochrome, mixed color temperature strobe
 Features: cast aluminum shell, high light efficiency, uniform light mixing, stable performance.
 With one in and one out of the hand 1 meter long power supply, signal line.
 Lamps and lanterns connection: three-core signal line IN/OUT; power line in/out
 LED angle: adjustable angle, Protection grade: IP22, Ambient temperature: -20°C - 40°C
 Sound control sensitivity: 65-130dB
 Product size: 28 cm*24 cm*30 cm Packing size(1pcs): 26 cm*26 cm*36 cm
 Packing size(4pcs): 54cm*54 cm*40 cm Net weight: 4 KG
 Gross weight(1pcs): 4.5 KG Gross weight(4pcs): 18.5KG



YE047B
54x3W Waterproof Par

Voltage: AC90V-220V 50Hz -60 Hz, Rated power: 200W, Light source: 54pcs 3W lamp beads (R12, G18, B18, W6)
 Light source life: 6-10 million hours LED angle: 15°, 25°, 45° (optional)
 Color: RGBW, 16.7 million color changes (0-100% saturation adjustable), built-in macro function
 Control: DMX512, master-slave control, self-propelled, Channel: 4CH/8CH
 Display: call a variety of scenes, the built-in program can be directly called to execute.
 Color temperature correction: 3200K - 7200K linear adjustment.
 Strobe: independent electronic strobe 1-25Hz, random strobe, pulse strobe, synchronous asynchronous strobe, monochrome, mixed color temperature strobe
 Features: cast aluminum shell, high light efficiency, uniform light mixing, stable performance.
 With one in and one out of the hand 1 meter long power supply, signal line.
 Lamps and lanterns connection: three-core signal line IN/OUT; power line in/out
 LED angle: adjustable angle, Protection grade: IP65, Ambient temperature: -20°C - 40°C
 Sound control sensitivity: 65-130dB
 Product size: 31cm*24 cm*28cm Packing size(1pcs): 30 cm*29 cm*36cm
 Packing size(4pcs): 62 cm*62 cm*38cm Net weight: 7 KG
 Gross weight(1pcs): 7.6 KG Gross weight(4pcs): 31.5KG




YE065B
72pcs LED Par Light

Input voltage: AC90V-220V 50Hz -60 Hz Rated power: 280W
 Light source: 3W * 72 lamp beads (R18,G18,B18,W18)
 Channel: 4CH/8CH switchable
 Operation mode: DMX self-propelled, master-slave synchronization, and Automatic trigger, voice control
 Function: electronic dimming from 0-100% (no color change)
 High-speed white light changing color, strobe 1-25fps/sec.
 Can be compiled dreamy, color mixing, fascinating effect.
 Beam angle: 15°, 25°, 30°, 45° optional
 Electrical strength: 1.5kv
 Insulation resistance: >2MΩ
 Lamp body size: 25 cm*25 cm* 34cm
 Packing size(1pcs): 25 cm*25 cm*36cm
 Packing size(4pcs): 54cm*54 cm* 40cm
 Net weight: 4.5 KG
 Gross weight(1pcs): 5 KG, Gross weight(4pcs): 22KG



YE066B
120pcs LED Par Light

Input voltage: AC90V-220V 50Hz -60 Hz Rated power: 400W
 Lamp beads: 120pcs 3W LED Optical lens: 25°
 8 standard DMX512 channels color: 16.7 million kinds of
 Color change, color flow function, speed adjustable
 A variety of strobe: 1-25 times / second Control mode: DMX512 signal control mode.
 Master-slave control mode Electronic dimming 0-100% linear adjustment
 Display board: liquid crystal display panel Cooling mode: fan cooling
 Protection measures: over-current, over-voltage, temperature protection
 Expected service life: 50000 hours
 Lamp body size: 26cm*28cm*34cm
 Packing size(1pcs): 29 cm*29 cm*39 cm
 Packing size(4pcs): 33 cm*64 cm*44 cm
 Net weight: 6.5 KG
 Gross Weight(1pcs): 7.5 KG
 Gross weight(4pcs): 16KG

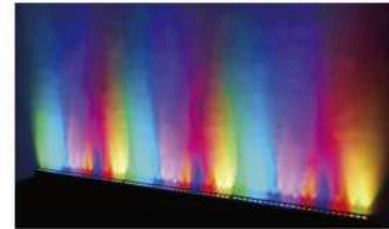


YE039
18x10W 4in1 Wall Washer

Input voltage: AC90V-220V 50Hz -60 Hz
 Light source: 18 x 10W RGBW 4 in 1 point control
 Rated power: 200W
 Lens angle: 15°, 25°, 40° optional
 Operation mode: DMX, main/sub, voice-activated mode
 DMX channel: 9/23/72CH
 Dimming: 0-100% linear dimming
 Protection grade: IP20
 Lamp body size: 100 cm*15 cm*9 cm
 Packing size(1pcs): 100 cm*10 cm*15 cm
 Packing size(4pcs): 102 cm*24cm*34cm
 Net weight: 9 KG
 Gross weight(1pcs): 10 KG
 Gross weight(4pcs): 41 KG




YE040
18x10W Waterproof 4in1 Wall Washer

Input voltage: AC90V-220V
 Frequency: 50Hz -60 Hz
 Light source: 18 x 10W RGBW 4 in 1 point control
 Rated power: 200W
 Lens angle: 15°, 25°, 40° optional
 Operation mode: DMX, main/sub, voice-activated mode
 DMX channel: 9/23/72CH
 Dimming: 0-100% linear dimming
 Protection class: IP65
 Lamp body size: 100 cm*15 cm*9 cm
 Packing size(1pcs): 100 cm*10 cm*15 cm
 Packing size(4pcs): 102 cm*24cm*34cm
 Net weight: 9 KG
 Gross weight(1pcs): 10 KG
 Gross weight(4pcs): 41 KG

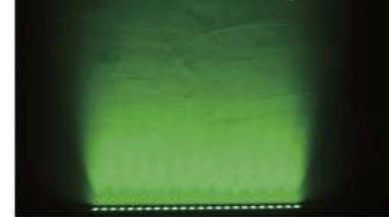

YE041F
36pcs 3in1 LED Wall Washer

Input voltage: AC90V-220V 50Hz -60 Hz
 Rated power: 180W
 Light source: 36pcs 3in1 lamp beads (RGB three-color LED lamp beads) with a long life.
 Advantages: high luminous efficiency, no radiation and low power consumption
 Channel: 5CH
 Beam angle: 15° /25 degrees.
 Function: seven color gradient, DMX512 control, self-propelled, master-slave control
 Lamp body size: 100 cm*17.5cm*13 cm
 Packing size(1pcs): 102 cm*15cm*9 cm
 Packing size(4pcs): 104 cm*21cm*34cm
 Net weight: 3.5 KG
 Gross weight(1pcs): 4 KG
 Gross weight(4pcs): 15.5 KG

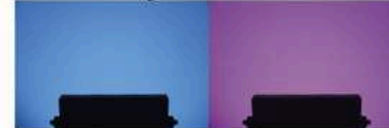

YE050
54pcs LED Wall Washer

Input voltage: AC90V-220V 50Hz -60 Hz Rated power: 250W
 Channel: 6CH
 Light source: 3W*54pcs
 Light source life: 6-100,000 hours
 Dimming: 0-100%
 Strobe: 1-20 times / sec
 Cooling system: natural convection heat transfer
 Light body part and color: die-casting aluminum, black
 Waterproof grade: IP65
 Function: seven-color gradient, DMX512 control, self-propelled, master-slave
 Lamp body size: 42 cm*30cm*9cm
 Packing size(1pcs): 47 cm* 41cm*17 cm
 Packing size(4pcs): 70 cm* 50cm*42 cm
 Net weight: 5.5 KG
 Gross weight (1pcs): 6.5 KG
 Gross weight(4pcs): 27 KG



YE057B
108pcs LED Wall Washer

Input voltage: AC90V~220V 50Hz ~60 Hz Rated power: 350W
 Channel: 6CH
 Light source: 3W*108pcs
 Light source life: 6~100,000 hours
 Dimming: 0~100%
 Strobe: 1~20 times / sec
 Cooling system: natural convection heat transfer
 Light body part and color: die-casting aluminum, black
 Waterproof grade: IP20
 Function: seven-color gradient, DMX512 control, self-propelled, master-slave
 Lamp body size: 42 cm*30cm*9cm
 Packing size(1pcs): 47 cm*41cm*17 cm
 Packing size(4pcs): 70 cm*50cm*42 cm
 Net weight: 5.5 KG
 Gross weight (1pcs): 6.5 KG
 Gross weight(4pcs): 27 KG

YE045
10W RGBW Crystal Pixel Light

Product size: Φ90*H63mm
 Light source: imported 10W/25W four-in-one lamp beads
 Optical angle: 15° /24° /38° optional
 Opening size: Φ75 or handle hanging mode
 Control mode: single lamp single control, each lamp an independent control box
 Wiring: power signal hand in hand Connection, easy to install, no interference



YE010
LED RGB Strobe

Input voltage: AC90V~220V 50Hz ~60 Hz
 Rated power: 280W
 Light source: 960pcs 5050 tri-color LED beads
 Control mode: DMX512, self-propelled, master-slave, voice-activated, with RDM function.
 Channel: CH03, CH10, CH360
 Dimming: 32bit 0~100% linear dimming
 Features: 120 segments running + coloring + burst flash
 Operating temperature: -30°C ~ 50°C
 Strobe frequency: 1~30HZ
 Connection: DMX512 input and output / power input and output.
 IP Rating: IP20
 Lamp body size: 45 cm*22 cm*20 cm
 Packing size (1pcs): 51 cm*29 cm*20 cm
 Packing size (4pcs): 60 cm*54 cm*43 cm
 Net weight: 3.5 KG
 Gross Weight (1pcs): 4.5 KG
 Gross weight (4pcs): 20 KG




YE011
LED RGBW Strobe

Input voltage: AC90V~220V 50Hz ~60 Hz
 Rated power: 600W
 Light source: 960pcs 5050 tri-color LED beads +96pcs white LEDs
 Control mode: DMX512, self-propelled, master-slave, voice-activated, with RDM function.
 Channel: 3CH/9CH/24CH
 Dimming: 32bit 0~100% linear dimming
 Features: 8+8 segments running + coloring + burst flash
 Operating Temperature: -30 degree-50 degree
 Strobe frequency: 1~30HZ
 Appearance: Metal, Black
 Connection: DMX512 voice control self-propelled master-slave
 IP Rating: IP20
 Lamp body size: 45 cm*26 cm*10 cm
 Packing size(1pcs): 51 cm*29 cm*20 cm
 Packing size(4pcs): 60 cm*54 cm*43 cm
 Net weight: 3.5 KG
 Gross Weight(1pcs): 4.5 KG
 Gross weight(4pcs): 20KG



YE010FS
LED Waterproof Strobe

Input Voltage: AC900V~220V 50Hz~60Hz
 Rated power: 1200W
 Light source: 4 in 1 high brightness LED5054 SMD beads
 Number of lamps: 1200 pcs
 Lamp bead power: 1.0W /pcs
 Effect: colorful strobe effect and uniform RGBW anode color mixing system
 Support coloring rainbow effect
 Channel: 18CH /8CH mode
 Zoning: 5 zones 24 segments
 Control Mode: DMX / sound control / automatic
 Strobe speed: 0~20/S
 Dimming: 0~100% linear dimming
 Waterproof rating: IP66
 Lamp body size: 62 cm*34 cm*12 cm
 Package Size: 68 cm*40 cm*22 cm
 Net weight: 13.6 KG
 Gross weight: 15 KG

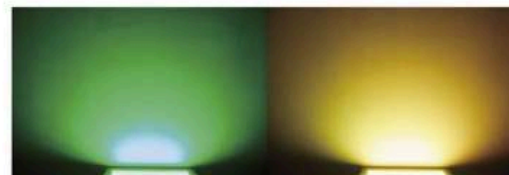

YE022
LED Waterproof City Color

Input voltage: AC90V~220V
 Frequency: 50Hz ~60 Hz
 Rated power: 900W
 Light source: 72pcs 10W LED beads RGBW
 Lifespan: 50000 hours
 Dimming: 0~100%
 Strobe: 1~20 times / sec
 Beam angle: 40
 Display board: digital or LCD
 Control mode: standard DMX512 signal, 3-core interface, master-slave, automatic operation.
 Control channel: 4 / 8 / twelve leads
 Cooling system: natural convection heat transfer.
 Lamp body color: aluminum and black.
 IP rate: IP65
 Acting distance: 30m
 Temperature: 20°C ~ 40°C



YE015
44X12W LED RGBW Waterproof City Color

Input voltage: AC90V~220V 50Hz ~60 Hz Rated power: 550W
 Light source: 44pcs 12W RGBW four-in-one brightness
 LED beads higher than ordinary light beads
 Light source life: 100,000 hours
 Color: Uniform RGBW color mixing system to create unlimited dynamic motion, infinite color variations.
 Built-in macro function Dimming: 0~100%
 Strobe: 1~20 times/second Lens angle: 25° , 30° , 45° optional
 Display board: color screen
 Control mode: standard DMX512 signal, 3-core interface, master-slave control, self-propelled mode
 DMX channel: 10CH, Support RDM, Projection distance: 50 meters
 Vertical 185° manual adjustment
 Cooling system: ultra-quiet waterproof fan, intelligent speed adjustment
 Operating temperature: -20 ℃ ~ 40 ℃
 Widely used in: professional stage / video studio / theater / building lighting / landscape lighting / city night lighting.
 IP rating: IP65
 Lamp Body Size: 53 cm*24cm* 37cm
 Package Size: 58 cm* 31cm* 46 cm
 Net weight: 11.5 KG Gross Weight: 13.5 KG





YE003
7x60W LED Retro Background Light

Input voltage: AC90V-220V 50Hz -60 Hz
 Light source: 7 x 60W LED (customized light source)
 Rated power: 420W
 Color temperature: 2200K
 Control mode: self-propelled / master-slave / DMX512
 DMX Channels: 1CH/8CH /7CH-Pixel
 Data connection: 3/5 Pin XLR (optional)
 Display: LCD screen
 Installation: Tripod support/hanging/base-mounted floor placement
 Shape: Hexagonal
 Reflective Bowl Color: Silver
 Exterior Color: Black (Standard)/White (Customized)
 Lamp body size: 64cm*51cm*12cm
 Package Size: 57cm*57cm*17cm
 Net weight: 6KG
 Gross weight: 8KG



YE007
6x60W LED Retro Background Light

Input voltage: AC90V-220V 50Hz -60 Hz
 Rated power: 420W
 Heat dissipation method: metal heat conduction
 Maximum ambient temperature: 45°C
 Lamp beads: 6 high brightness 60W lamp beads + 144 LED 3in1 lamp beads
 Lamp bead type: RGB 3in1 lamp beads + integrated lamp beads
 Strobe: 1-25 times / sec
 DMX control channel number: 8CH+28CH
 DMX connector: 3Pin XLR
 Operation Mode: DMX/Auto/Sound Control
 Display mode: LED digital tube
 Lamp body size: 100cm*15cm*14cm
 Packing size(1pcs): 101cm17*cm*15cm
 Packing size(2pcs): 103cm35*cm*17cm
 Net weight: 4.5KG
 Gross weight(1pcs): 5KG
 Gross weight(2pcs): 11KG



YE004
LED Small Retro light

Input voltage: AC90V-220V 50Hz -60 Hz
 Rated power: 200W
 Light source: a 60W golden yellow light + 36 x3W RGB lamp beads
 Control mode: international general DMX512, 8 channels
 Working mode: DMX512, master/slave, self-propelled, voice-activated
 Dimming mode: 0-100% ultra-smooth dimming
 Strobe: 25 times / sec
 Features: can be spliced at will
 Light body size: 21cm * 20cm * 18cm
 Packing size(1pcs): 20cm * 19cm * 17cm
 Packing size(4pcs): 38cm*23cm*36cm
 Net weight: 2KG
 Gross weight(1pcs): 2.5 KG
 Gross weight(4pcs):11 KG



YE008
LED Kinetic Lifting Ball

Input voltage: AC90V-220V 50Hz-60Hz
 Light source: 6x3W 3 in 1 lamp beads
 Rated power: 35W
 Allowable ambient temperature during operation: 5°C-45°C.
 Channel: 7 control channels
 Control mode: DMX512 control system / master-slave / self-propelled
 Lifting range: 1.5 meters lift-12 meters lift
 Hanging weight: 2.5kg
 Lifting chassis size: 200x130x250mm
 Carton package size: 275x255x170mm
 Weight: 5.5kg
 Gross weight: 6.5kg



YE005
Hexagon LED Retro Light

Input voltage: AC90V-220V
 Frequency: 50Hz -60 Hz
 Rated power: 300W
 Light source: 48pcs 3W 3535RGB lamp beads
 Control mode: international general DMX512, 8 channels 10 channels
 Work mode: DMX512, master / slave, self-propelled, voice-activated
 Dimming mode: 0 - 100% ultra-smooth dimming
 Strobe: 25 times / second three 60W golden light
 Package Size: 50 cm*44cm*27cm
 Gross weight: 76 KG



YE023
Kinetic LED Lifting Beam

Circle
 Power: 450W
 Light source: 45 OSRAM 25W 4 in 1
 Lighting angle: 3°
 Features: point empty running horse
 Size: diameter 1.1 meters, Weight:9KG
 Lift
 Quantity:3 sets of lifts
 Rated voltage: AC100V-240V, 50/60Hz
 Max. power: whole lamp power: 350Wx3=1050W
 Display: 1.77-inch color screen Chinese and English display
 Protection function: electronic fall prevention/driver shaft brake
 Control mode: DMX512 voice-activated self-propelled function
 Channel mode: 22CH
 Connection mode: blue and white plug /XLR3 core canon seat

Lifting stroke: 1m-6m
 Average speed: 0.5m/s
 Maximum load: 8kg
 Protection grade: IP20
 Shell material: fireproof aluminum alloy
 Working temperature: -40°C-45°C
 Product size: 381*153*293MM
 Lamp Packing: 1 set of 2
 Product weight: 12KG
 Lamp Accessories: 1 manual / 1 warranty card
 Scope of use: concerts/music festivals /large events/commercial space /high-end entertainment venues

YE006
Quadrangle Retro Background Light

Input voltage: AC90V-220V 50Hz -60 Hz
 Rated power: 350W
 Light source: 4x60W golden yellow light +48x3W 3in1 lamp beads +6x12W 4in1 bee eye lamp beads
 Control mode: international general DMX512
 Channel: 15 channels / 20 channels / 26 channels
 Working mode: DMX512, master/slave, self-propelled, voice-activated
 Dimming mode: 0-100% ultra-smooth dimming
 Strobe: 25 times / se
 Inner package size: 51cm*51cm*26cm
 Outer package size: 53cm*53cm*55cm
 Net weight: 8KG
 Gross weight: 19KG
 Number of boxes: 2




YE173
36pcs RGBW 4in1 Diamond Matrix

Input voltage: AC90V-220V 50Hz -60 Hz
 Rated power: 300W
 Light source: 36x8W 4N1 LED beads
 Control mode DMX512, self-propelled, master-slave, voice-activated.
 DMX512 channel:4CH,12CH,144CH
 Dimming: 0-100% linear dimming
 Strobs: no pole strobe
 Operating temperature: -10 degrees / 50 degrees
 Protection grade: IP20
 Characteristics: coloring + burst flash, support stalk to vertical splicing
 Lamp body size: 50 cm*50 cm*12 cm
 Package size(1pcs): 55 cm*55 cm*15cm
 Packing size(2pcs): 57 cm*57 cm*31cm
 Net weight: 6.8 KG
 Gross weight(1pcs): 8 KG
 Gross weight(2pcs): 17KG





YE024
LED 6x40W Pixel Beam Bar
 Input voltage: AC90V-220V 50Hz -60 Hz Rated power: 500W
 Lamp beads: 6x 60W 6070 lamp beads, 96pcs 7070 lamp beads, divided into 12 segments
 Control mode: DMX512, Auto, master-slave, Sound active, with RDM function
 Channel: CH24, Ch132 Dimming: 32bit 0-100% linear dimming
 Features: XY moving head + beam + burst flash + XY infinity
 Operating temperature: -30°C - 50°C, Strobe frequency: 1-30HZ
 Appearance: metal, black
 Connection: DMX512 input/output / power input/output
 IP Rating: IP20
 Lamp body size: 51 cm*21 cm*28cm
 Package Size: 67 cm*39 cm* 32cm
 Net weight: 10 KG
 Gross weight(1pcs): 11KG
 Gross weight(2pcs): 22KG

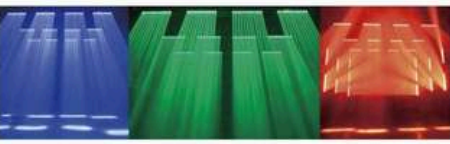

YE228
LED 10x40W Moving Beam Bar
 Input voltage: AC90V-220V 50Hz -60 Hz
 Rated power: 550W
 Light source: 10pcs 40W 4in1 lamp beads
 Channel: 43CH/13CH/7CH
 Control mode: DMX / master-slave / voice-activated
 Vertical scanning: 270°
 Strobe: 1-25 times / sec or randomly
 Display: LCD
 Lens: conventional 3.5" -4"
 Lamp body size: 109 cm*11 cm*25 cm
 Packing size(1pcs): 118 cm * 16 cm * 30cm
 Packing size(2pcs): 119cm*34cm*33cm
 Net weight: 10 KG
 Gross weight(1pcs): 11 KG
 Gross weight(2pcs): 23 KG



YE227
LED 12x40W Beam Bar with Zoom
 Input voltage: AC90V-220V 50Hz -60 Hz Rated power: 500W
 Light source: 12pcs 40W 4in1 lamp beads + 144pcs 0.3W 3in1 lamp beads
 Control mode: DMX512, self-propelled, master-slave, voice-activated, with RDM function.
 Channel: CH24, CH36, CH60, CH72, CH144
 Dimming: 32bit 0-100% linear dimming
 Features: Y moving head + beam + burst flash + auxiliary light
 Operating temperature: -30°C - 50°C
 Strobe frequency: 1-30HZ
 Appearance: metal, black
 Connection: DMX512 input and output / power input and output.
 IP Rating: IP20
 Lamp body size: 100 cm*11 cm*29 cm
 Package Size: 109 cm* 21cm* 37cm
 Net weight: 14.5 KG Gross Weight: 17 KG

YE034
5 Heads RGBW LED Moving Beam
 Input voltage: AC90V-220V 50Hz -60 Hz Rated power: 400W
 Light source: 5x80W RGBW + 4x10W golden light
 Control mode: international general DMX512
 Beam caliber: 100mm
 Light East Angle: 3.5 degrees
 Golden beam angle: 5.5 degrees
 Dimming mode: 0 - 100% ultra-smooth dimming
 Strobe: 25 times / sec
 Outlet: blue and white audio socket, 3-pin XLR seat
 Function: built-in a variety of macro functions, each lamp bead can be individually controlled, with point control function
 XY-axis: horizontal infinitely scanning, vertical single control
 Waterproof grade: IP20
 Lamp body size: 85*18*32cm
 Package size: 95x27x41cm
 Net weight: 12KG
 Gross weight: 15.5KG




YE037
LED Pixel Strobe Bar
 Input voltage: AC90V-220V 50Hz -60 Hz
 Rated power: 420W
 Light source: 240pcs 7070 lamp beads + 480pcs LED lamp beads
 Control mode: DMX512, Auto run, master-slave, voice control, with RDM
 Channel: 4CH/11CH/140CH
 Dimming: 16bit 0-100% linear regulation
 Characteristics: Running + burst flash
 Operating Temperature: -30°C - 50°C
 Appearance: metal, black Connection: DMX512
 IP Rating: IP20
 Lamp body size: 100 cm*7cm*8cm
 Packing size(1pcs): 105 cm*14 cm*15 cm
 Packing size(4pcs): 106 cm*30 cm*34 cm
 Net weight: 4.5 KG
 Gross weight(1pcs): 5 KG
 Gross weight(4pcs): 23 KG



YE030B
LED Waterproof Strobe
 Voltage: AC100-240V 50/60HZ Power: 420W
 Lamp beads: 240pcs 7070 lamp beads + 480pcs LED lamp beads
 Control mode: DMX512, self-propelled, master-slave, voice control, with RDM function
 Channel: 4CH/11CH/140CH
 Dimming: 16bit 0-100% linear dimming
 Features: Running + burst flash
 Operating temperature: -30°C - 50°C
 Strobe frequency: 1-30HZ
 Appearance: metal, black
 Connection: DMX512
 Input/Output/Power Input/Output
 IP Rating: IP65
 Lamp size: 100cm* 15cm*9 cm
 Net weight: 9KG



YE225
5x120W RGB LED Moving Beam Bar
 Voltage: AC100-240V 50/60HZ Power: 800W
 Lamp beads: 5pcs 120W RGBA(1212 lamp beads) + 120pcs RGB auxiliary light
 Control mode: DMX512, self-propelled, master-slave, voice control, with RDM function.
 Channel: CH41, CH71
 Dimming: 32bit 0-100% linear dimming
 Features: Single Swing + Dye + Beam
 Operating Temperature: -30 degree-50 degree
 Strobe Frequency: 1-30HZ
 Appearance: Metal, Black
 Connection: DMX512 input and output / power input and output.
 IP Rating: IP20
 Lamp body size: 99cm* 18cm*36 cm
 Net weight: 23.5KG

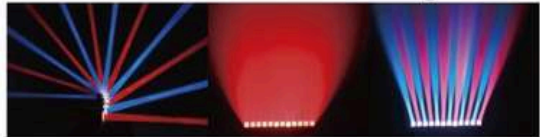


YE226
12x60W RGBW LED Beam Bar with Zoom
 Voltage: AC100-240V 50/60HZ
 Power: 12*60W (800W)
 Lamp beads: 12 4in1 60W LED lamp beads
 Control mode: DMX512, self-propelled, master-slave, voice-activated, with RDM function.
 Channel: CH20, CH169A, CH169B, CH53, CH101, CH155, CH179
 Dimming: 32bit 0-100% linear dimming
 Features: single head moving + wash+ beam effect
 Operating Temperature: -30 degree-50 degree
 Strobe Frequency: 1-30HZ
 Appearance: Metal, Black
 Connection: DMX512 input and output / power input and output.
 IP Rating: IP20
 Size: 1000*300*165MM
 Weight: 26.5KG



YE084 /YE086
400W/600W LED Moving Zoom COB Par

Input voltage: AC90V-220V 50Hz-60 Hz Rated power: 450W/650W
 Light source: 400W COB / 600W brightness LED lamp beads, Color temperature: 6000K
 Lifespan: 50000 hours, Color: 6000K positive white LED, with CTO color temperature correction
 Dimming: 0-100% linear dimming, with CTO color temperature correction
 Strobe: Strobe 1-25Hz, IP protection level: indoor Ip20
 Lighting angle: electric focus, focus angle 6-50 degrees
 Control signal: international standard DMX512 signal
 X-axis running angle: 540° (16bit) linear correction
 Y-axis operating angle: 270° (16bit) linear correction, Number of channels: 10CH
 Control mode: master-slave, self-propelled, standard DMX512, voice control
 Heat dissipation mode: air-cooled + natural heat dissipation
 Heat dissipation control: motherboard intelligent temperature control system, over-temperature overheating automatic protection
 Material: Aluminum Chassis Color: Black Working environment: -20°C-40°C
 High display index: CRI >95 Projection distance: 6-150m
 Features: with RDX function, intelligent fan, temperature detection
 Ultra-high brightness, energy-saving and efficient, can replace the traditional 1000W-3000W PAR lamps
 Lamp body size: 26 cm*22 cm*45 cm, packing size: 44 cm*41 cm*54 cm, N.W.: 9 KG, G.W.: 11 KG

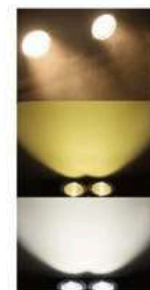


YE170T/YE171FS/YE171
Two Eyes Audience Blinder(Indoor/Outdoor/Pixel)

Input voltage: AC90V-220V 50Hz-60 Hz Rated power: 250W
 Light source: 2x100W LED lamp beads (can do single color / 2 in 1)
 Color temperature: 3200-6500 Light source life: 50000-100000hours
 Dimming frequency: 1000Hz Driving current: 700mA
 Strobe: 1-10 times / per second Lens angle: 60°
 Control mode: DMX512, self-propelled, master-slave, Control channel: 8CH
 Features: simple operation, dimming without flicker, no jitter phenomenon, etc.
 Color temperature, brightness and strobe can be adjusted by DMX 512 signal.
 Energy saving, durability, low noise, soft light color, no jitter phenomenon
 Applicable places: can be adapted to the electric studio, meeting rooms, studios, wedding ceremonies and stage performances, such as surface lighting and other lighting requirements of the strict occasions
 Lamp body size: 38cm*16 cm*25 cm
 Package size(1pcs): 42 cm*22 cm*22 cm
 Packing Size(2pcs): 570*230*215mm
 Net weight: 3 KG
 Gross weight(1pcs): 3.5 KG
 Gross weight(2pcs): 9KG



YE170FS
Waterproof 4x100W Audience Blinder

Input voltage: AC90V-220V 50Hz-60 Hz
 Rated power: 400W
 Light source: 4pcs 100W lamp beads
 Light-emitting color: white light /warm white
 High index: 90
 Light-emitting Angle: 60°
 Control mode: DMX / master-slave / self-propelled
 Channel: 2/6/12CH channel
 Color temperature: 3200-5600K (optional single color temperature)
 Housing: Aluminum
 Lamp body size: 37 cm*37cm*16cm
 Packing size(1pcs): 43 cm*43 cm*27 cm
 Packing size(2pcs): 45 cm*45 cm*57 cm
 Net weight: 11 KG
 Gross weight(1pcs): 12KG
 Gross weight(2pcs): 15KG



YE152/YE300
200W/300W LED COB Zoom Par

Input voltage: AC90V-220V 50Hz-60 Hz
 Rated power: 200W/300W
 Light source: 200W/300W LED COB lamp beads
 Color temperature: 3200K/5600K (optional)
 Color rendering index: >=90
 LUX: 5500lm (5 meters)
 LED lifetime: 50,000 hours
 Beam angle: 15°-60° motorized adjustment
 Dimming: 0-100% linear dimming
 DMX channels: 2/3/4/5CH
 Control mode: DMX512 control
 Protection level: IP20
 Material: aluminum alloy + plastic
 Lamp body size: 46 cm*28 cm*18 cm
 Packing size: 51 cm*36 cm*27cm
 Net weight: 5 KG
 Gross weight: 6 KG



YE170
4x100W Audience Blinder

Input voltage: AC90V-220V 50Hz-60 Hz Rated power: 450W
 Light source: 100W LED lamp beads x 4 (can do single /color 2 in 1)
 Color temperature: 3200-6500 Total power: 500W
 Light source life: 50000-100000hours Dimming frequency: 1000Hz
 Driving current: 700mA Strobe: 1-10 times/per second
 Lens angle: 60°
 Control mode: DMX512, self-propelled, master-slave
 Control channel: 8CH operation
 Features: simple operation, dimming without flicker, no jitter phenomenon, etc.
 Color temperature, brightness and strobe can be adjusted by DMX 512 signals
 Energy saving, durability, low noise, soft light color, no jitter phenomena
 Applicable places: can be adapted to the electric studio, meeting rooms, studios, wedding ceremonies and stage performances, such as surface lighting and other lighting requirements of strict occasions.
 Lamp body size: 39 cm*38cm*14cm Packing size(1pcs): 42 cm*42 cm*20 cm
 Packing size(2pcs): 45 cm*45 cm*43 cm Net weight: 5.5 KG
 Gross weight(1pcs): 6.5 KG Gross weight(2pcs): 13.5 KG




YE153/YE153L
100W/200W LED COB Par Light

Input voltage: AC90V-220V 50Hz-60 Hz
 Light source: 100W/200W LED lamp beads (can do single color / 2 in 1)
 Color temperature: 3200-6500
 Rated power: 150W/250W
 Light source life: 50000-100000hours
 Strobe: 1-10 times/per second
 Total power: 150W
 Lens angle: 60°
 Control mode: DMX512, self-propelled, master-slave
 Channel: 2/6 DMX channels
 Lamp body size: 28 cm*24 cm*30 cm
 Packing size(1pcs): 26 cm * 26 cm * 36 cm
 Packing size(4pcs): 54cm*54 cm*40 cm
 Net weight: 4 KG
 Gross weight(1pcs): 4.5 KG
 Gross weight(4pcs): 18.5KG



YE151FS
Waterproof 4x50W COB Par Light

Input voltage: AC90V-220V 50Hz-60 Hz
 Rated power: 250W
 Light source: 4x50W super bright LED lamp beads
 (can do cool white /warm white or cool white + warm white 2in1 color)
 Function: signal control 4/8 international standard DMX512 channel control, voice control, self-propelled, master-slave synchronization
 Luminous angle: reflector
 Place: for large-scale stage performances, bars, KTV, wedding, etc.
 Waterproof grade: IP65
 Light body size: 26 cm*29 cm*24 cm
 Packing size(1pcs): 30 cm*29 cm*36 cm
 Packing size(4pcs): 62cm*62 cm*38 cm
 Net weight: 5 KG
 Gross weight(1pcs): 6 KG
 Gross weight(4pcs): 25 KG

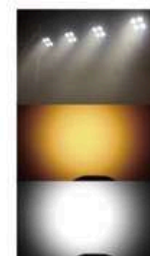

YE151
4x50W LED COB Par Light

Input voltage: AC90V-220V 50Hz-60 Hz Rated power: 250W
 Light source: 4pcs 50W LED lamp beads Light source life: 100000 hours
 Color temperature: warm white 3200K, positive white 6500K
 (cool white/warm white/2in1 optional)
 Dimming: 0-100%
 Beam angle: 18 degrees / 25 degrees optional (default 25 degrees)
 Operating Temperature: -25°C-50
 Control mode: DMX512, self-propelled, master-slave, voice-activated
 Channel: 8 DMX channels
 Features: ultra-high brightness, more than the general conventional COB surface light
 brightness, imported LED lamp beads, irradiation distance far away
 Lamp body size: 28 cm*24 cm*30 cm
 Packing size(1pcs): 26 cm*26 cm*36 cm
 Packing size(4pcs): 54cm*54 cm*40 cm
 Net weight: 4 KG
 Gross weight(1pcs): 4.5 KG
 Gross weight(4pcs): 18.5KG



YJ014LB
200W/300W LED Profile Light

Input voltage: AC90-220V 50-60Hz
Light source: 200W/300W LED lamp beads
Control protocol: DMX512
Color temperature: 3200K/5600K/6500K
Optical illuminance: 2400Lux/5m
Heat dissipation treatment: copper tube heat conduction + silent fan
Material: all aluminum alloy manufacturing, built-in dimming power supply
Dimming: 0-100% accurate dimming, can be matched with a variety of different projection angle lens
High color rendering index: (Ra>95)
Features: no UV and infrared radiation, no lead and no mercury;
High luminous efficiency, high power LED light source, luminous flux up to 2200lm;
Energy saving, environmental protection, life expectancy of more than 50,000 hours
Lamp body size: 63 cm* 30m* 24cm
Packing size(1pcs): 74 cm*30 cm*34 cm
Net weight: 8 KG, Gross weight(1pcs): 9 KG, Gross weight(2pcs): 20KG


Color temperature: 3200K/5600K
Rated power: 250W/350W
Optional accessories: light barn door
Beam angle: 19/26 degrees optional
Refresh frequency: 2000HZ



YJ012
LED Air-cooled Profile Light(Waterproof optional)

Input voltage: AC90-220V 50-60Hz
Light source: 200W LED lamp beads
Control protocol: DMX512
Color temperature: 3200K/5600K/6500K
Optical illuminance: 2400Lux/5m
Heat dissipation processing: sub-cooled cooling ultra-quiet heat dissipation
All aluminum alloy manufacturing, built-in dimming power supply;
Dimming: can provide 0-100% accurate dimming, can be matched with a variety of different projection angle lens
High color rendering index: (Ra>95);Function: manual focus, manual cutting function
Features:
Clear spot without stray light Brightness saturation
No ultraviolet and infrared radiation, lead-free and mercury-free
High luminous efficiency, high power LED light source, luminous flux up to 2200lm
Energy saving, environmental protection
Lamp body size: 70 cm*25 cm*29 cm
Net weight: 11.5 KG

Color temperature: 3200K/5600K
Rated power: 250W
Number of channels: 2 channels
Beam angle: 19/26 degrees
Refresh frequency: 2000HZ

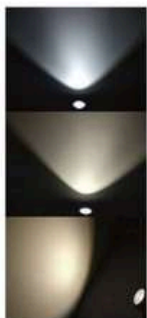

YJ076
200W/300W LED Theater Spot Light

Input voltage: AC90-220V 50-60Hz
LED light source: high-power COB electronic zoom
DMX channel: 1CH / 2CH
Strobe: 0-20 times / sec
IP rating: IP20
Lens: Fresnel lens
Luminous flux: 14500lm
Color temperature: 3200K / 5600K optional
CRI: >=90
Tilt angle: +/- 90°
Data connection: 2 lines
Lamp body size: 47 cm*19 cm*27 cm
Inner box size: 34 cm*27 cm*47 cm
Outer box size: 37cm*31cm*57cm
Net weight: 5.5 KG
Gross Weight: 7.5 KG

Rated power: 200W/300W
Gray level: 20000
LED life: 25000 hours
Beam angle: 15° - 50°



YJ078/YJ078B
LED Panel Conference Light

Input voltage: AC90-220V 50-60Hz
Dimming frequency: 1.2KHz
Number of lamp beads: F5 * 320/432pcs LED chip lamp beads
Color rendering index: PFC>0.95
Color temperature: 3200, 5600K optional
Dimming: 0-100%
Protection grade: Ip20
Beam angle: 120 degrees
Heat dissipation mode: no fan natural heat dissipation
Working Temperature: -25°C - +35°C
Shell material: aluminum alloy
Accessories: casement, power cord, signal cable
Lamp body size: 54 cm* 33cm* 9cm
Packing size(1pcs): 58 cm* 40cm* 15cm
Net weight: 5 KG

Rated power: 200W/300W
Gray level: 20000
Lamp bead life: more than 50000 hours
Channel mode: 2CH/6CH
Control mode: DMX512 control / manual control
Control panel: LCD + four keys
Dimming: 0-100% linear dimming

Packing size(4pcs): 61 cm* 42cm* 67cm
Gross weight(1pcs): 5.5KG
Gross weight(4pcs): 23KG



YJ077
RGBW Full Color Panel Conference Light

Input voltage: AC90-220V 50-60Hz
Dimming frequency: 1.2KHz
Number of lamp beads: F5 * 512pcs LED chip lamp beads (RGBW 4in1)
Color rendering index: PFC>95
Color temperature: RGBW mixed color
Dimming: 0-100%
Dimming: 0-100% linear dimming.
Heat dissipation mode: fanless natural heat dissipation
Control mode: DMX512 control/manual control
Working temperature: -25°C - +35°C
Accessories: cover case, power cable, signal cable
Lamp body size: 56 cm* 34cm*12 cm
Packing size(4pcs): 63 cm*43 cm*84 cm
Gross weight(1pcs): 7.5 KG
Gross weight(4pcs): 30KG

Rated power: 300W
Gray level: 20000
Lamp bead life: more than 50000 hours
Channel mode: 4CH/8CH
Control panel: LCD + four keys
Protection level: IP20
Shell material: aluminum alloy
Packing size(1pcs): 60 cm*40 cm*20 cm
Net weight: 7 KG



YJ073
LED High Power Panel Conference Light

Input voltage: AC90-220V 50-60Hz
Dimming frequency: 1.2KHz
Number of lamp beads: F5 * 1080pcs LED chip lamp beads
Color rendering index: PFC>0.95
Color temperature: 3200, 5600K optional
Dimming: 0-100%
Control panel: LCD liquid crystal display + four keys
Beam angle: 120 degrees
Heat dissipation mode: no fan natural heat dissipation
Control mode: DMX512 control / manual control
Working temperature: -25°C - +35°C.
Shell material: aluminum alloy
Accessories: casement, power cord, signal cable
Lamp body size: 53 cm* 20cm*25 cm
Net weight: 7 KG

Rated power: 500W
Gray level: 20000
Lamp bead life: more than 50000 hours
Channel mode: 2CH/6CH
Protection level: IP20
Dimming: 0-100% linear dimming.



YJ079/YJ079B
Embedded LED Panel Conference Light

Input voltage: AC90-220V 50-60Hz
Dimming frequency: 1.2KHz
Number of lamp beads: F5 * 320/432pcs LED chip lamp beads
Color rendering index: PFC>95
Color temperature: 3200, 5600K optional
Dimming: 0-100%
Beam angle: 120 degrees
Heat dissipation mode: no fan natural heat dissipation
Control mode: DMX512 control / manual control
Working Temperature: -25°C - +35°C
Accessories: casement, power cable, signal cable
YJ079 (320pcs lamp beads) Product size: 54 * 33 * 6cm
YJ079 (320pcs lamp beads) Opening size: 52 * 35cm
YJ079B (432pcs lamp beads) Product Size: 54*33*6cm
YJ079B (432pcs lamp beads) Opening size: 52 * 35cm

Rated power: 200W/300W
Gray level: 20000
Lamp bead life: more than 50000 hours
Channel mode: 2CH/6CH
Control panel: LCD + four keys
Dimming: 0-100% linear dimming
Protection level: IP20
Shell material: aluminum alloy



YJ080/YJ081
LED Embedded Electric Panel Conference Light

Rated power: 300W/200W
Light source: 600pcs/352pcs high brightness LED beads
Color temperature: 5600K/3200-5600K
Flip angle: 0-90°, electric flip
Number of channels:
Single color temperature 2 channels, dual color temperature 4 channels
Cooling system: natural air cooling, intelligent temperature control (constant power)
Optical system: 100% linear dimming no strobe no noise
Shell material: steel + aluminum alloy
Installation: embedded installation, Signal line: three-core signal XLR head input and output
Control protocol: DMX512, Control mode: master + DMX control
Link mode: power line/signal line in/out
Application: scene lecture hall, multi-functional hall, video conference room, meeting
YJ081 lamp body weight: 8.5kg
YJ081 opening size: 500*340MM
Customized aperture size is available.
YJ081 appearance size:500*350MM

Input voltage: AC90V-220V 50-60Hz
Color rendering index: Ra>=95
Dimming function: 0-100% linear adjustment
Service life: >= 50000h
Shape: rectangular
YJ080 lamp body size: 596*394*140mm
YJ080 lamp body weight: 10.35kg
YJ080 opening size: 585*383mm
YJ080 luminous area: 275*470mm



YC012/YC013 440 Follow Light

Input voltage: AC90V-220V 50Hz-60Hz
Light source: 300W/400W
Projection distance: 80 meters
Color temperature: 3 color temperature
Aperture: linear aperture size
Color: a color wheel 5 colors (white, red, green, blue, purple, yellow)
Control system: manual keyboard or DMX512 signal, Control mode: manual DMX215 mode
Heat dissipation system: high-intensity air-cooled + pure copper heat dissipation + nano thermal conductivity + aluminum profile heat dissipation
Safety Measures: Comply with various safety standards.
Protection level: Ip20
Lamp body size: 83 cm*34 cm*37 cm
Packing size of bracket: 107cm*15 cm*15 cm
Gross weight of lamp body: 18 KG
Gross weight of stand: 5.5KG

Rated power: 350W/450W
Projection distance: beam angle 6-15°
Channel: 4CH
Light gate: linear cut light, strobe
Aperture effect: aperture size adjustable
Housing: Aluminum alloy cladding
Lamp body package size: 96 cm*36 cm*42 cm
Net weight: 15.5 KG
Net weight of stand: 4.5KG

YC009 600W 5in1 Follow Light

Voltage: AC90V-240V 50Hz/60Hz
Light source: 600W
Beam angle: 6-15°
Color temperature: 5 color temperature
Light gate: linear dimming, strobe
Aperture: linear aperture size
Aperture effect: aperture size adjustable
Color: a color wheel 5 colors (white, red, green, blue, orange, yellow)
Control system: manual keyboard or DMX512 signal
Control mode: manual DMX215 mode
Heat dissipation system: high-intensity air-cooled + pure copper heat dissipation + nano thermal conductivity + aluminum profile heat dissipation
Safety measures: comply with various safety standards
Protection level: IP20
Shell: Aluminum alloy cladding
Lamp body size: 98*23*23cm

Power consumption: 700W
Projection distance: 200 meters
Channel: 5CH

YI024 600W Dual Fog Machine

Voltage: AC 110V/240V 50Hz-60Hz
Power: 600W
Preheating time: no need to preheat, continuous smoking
Oil drum capacity: 3L
Oil consumption: 1 liter can be used continuously for 25 hours
Fan angle: adjustable
DMX512 signal: support 512 signal control
Display: LCD liquid crystal control panel, remote control
Shell: with air box
Size: 50 cm*38 cm*14 cm
Gross weight: 13 KG

YI012 1500W Mist Machine


Voltage: AC 230V 50Hz
Fuse: 16A
Power: 1500W
Preheating time: 4 minutes
Fuel consumption: 2ml/MIN
Wireless remote control: optional
Operation language: Chinese and English switching
DMX channels: 2
Lamp body size: 35 cm*33 cm*34 cm
Packing size: 51 cm*45 cm*35 cm
Net weight: 11 KG
Gross weight: 13 KG



YI005 1500W LED RGB Fog Machine

Power supply: 220 V AC, 50Hz
Power consumption: 1500 W
Fog output: 30,000 talents/min.
Beads: Equipped with 24pcs 3-in-1 RGB high brightness LED beads
Features: Simultaneous output of fog and light-emitting LEDs to present colorful fog light-emitting effect
Fog Timer: FM-8 with blue LCD display (fog output interval setting and fog continuous output time adjustment)
Lamp size: 41 cm*30 cm*18 cm
Packing size(1pcs): 47 cm*37 cm*27 cm
Packing size(2pcs): 50 cm*40 cm*59 cm
Net weight: 7 KG
Gross weight(1pcs): 8 KG
Gross weight(2pcs): 17.5 KG

Fuse: 10A 250V
Warm-up time: approx. 10 min.
Tank volume: 2.5 liters

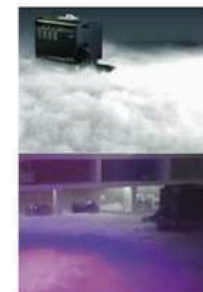

YI030 3000W Water Mist Machine

Voltage: AC110V-220V 50Hz-60Hz
Power: 3000W
Pre-start time: 3 minutes
Control mode: remote control, DMX-512
Digital timing quantitative control
Lamp body size: 60cm*40 cm*28 cm
Package size: 69 cm*47 cm*47 cm
Net weight: 21 KG
Gross weight: 28 KG



YI007 Bubble Machine

Voltage: AC110V/230V
Frequency: 50-60Hz ± 10%
Power: 200W
Bubble oil capacity: 2.5kg
Bubble blowing height: 10 meters
Bubble coverage area: 100 square meters
Control mode: remote control (30 meters), manual
Light body size: 51cm*39 cm*44 cm
Package size: 49 cm*43 cm*46 cm
Net weight: 8.5KG
Gross weight: 10KG



YI006 Snowflake Machine

Voltage: AC110V/230V
Frequency: 50-60Hz ± 10%
Power: 1500W
Bubble oil capacity: 5kg
Bubble coverage area: 60 cubic meters
Control mode: wire control, remote control, DMX512
Product size: 52cm*26cm*30cm
Package size: 59cm*33cm*37cm
Net weight: 6.2KG
Gross weight: 8.5KG

YD007
8 Eyes Single Red Moving Laser Bar



Voltage: AC110V-230V, 50/60Hz Laser: semiconductor pumped all-solid-state laser
 Total power: red light 2W Red light: wavelength 638nm
 Power: 300MW
 Scanning system: engaged in precision stepper motor scanning system, 280° large angle scanning
 Control mode: voice control / automatic / DMX / master-slave control
 Control channel: 14 DMX-512 signal channels, Cooling system: fan forced cooling system
 Working environment: Indoor (10-35°)
 Product size: 106cm*8cm*16cm
 Packing Size(1pcs): 110cm*15cm*21cm Packing size(2pcs): 112cm*33cm*23cm
 Net weight: 6KG Gross weight(1pcs): 6.5KG Gross weight(2pcs): 14KG

YD009
6 Eyes RGB Moving Laser Bar



Product Name: Six-head full-color laser, Rated Voltage: AC100V-230V 50-60Hz ± 10
 Rated Power: 150W, Laser Light Source: Semiconductor Pump Laser, Laser Modulation: TTL
 Laser wavelength: RGB, Laser Power: 6000mW (1000mW*6PCS), Laser Color: Full Color
 Laser System: Precision stepper motor scanning system, Y-axis infinitely oscillating 360°
 X-axis laser head can be oscillated.
 Laser effect: laser infinite beam show, laser running line effect, laser strobe effect,
 LED beam sense, running water strobe and other effects
 Control modes: voice-activated, self-propelled, DMX512, master-slave effects
 DMX channels: 11, 23, 38 channels can be selected. Use of the environment: indoor
 Applicable places: bars, KTV, performance bars, dance halls, hotel banquet halls, entertainment venues, etc.
 Working temperature: -20° C-50° C Light body size: 83cm*9cm*23cm
 Packing size(1pcs): 99cm*22cm*28cm Packing size(2pcs): 102cm*46cm*30cm
 Net weight: 9.5KG Gross weight(1pcs): 11KG Gross weight(2pcs): 24KG

YD011
8+8 LED Red Moving Laser Bar



Rated Voltage: AC100V-230V 50-60Hz ± 10, Rated power: 150W
 Laser Source: Semiconductor Pump Laser, Laser Modulation: TTL, Laser Wavelength: 638nm
 Laser Power: 4000mW (500mW*8PCS), Laser color: Red
 LED: 8pcs 5W Cree beads, beam angle 3-5° , selectable color temperature
 Laser System: Precision stepper motor scanning system, 180 degree angle controllable.
 Laser effect: laser skyline beam show, laser running line effect, laser strobe effect,
 LED beam sense, running water strobe effect, etc.
 Control modes: voice-activated, self-propelled, DMX512, master-slave effect
 DMX channel: 23 channels can be selected. Use of the environment: indoor
 Applicable: bars, KTV, performing arts bar, dance halls, hotel banquet halls, entertainment venues, etc.
 Working temperature: -20° C-55° C, Light body size: 107cm*8cm*16cm
 Packing size(1pcs): 116cm*16cm*22cm, Packing size(2pcs): 118cm*33cm*24cm
 Net weight: 6KG, Gross weight(1pcs): 7KG, Gross weight(2pcs): 16KG

YD015
2W RGB Starry Laser(Indoor/Outdoor)



Working voltage: AC100-240V 50/60Hz; 100VA, Laser Configuration: W2000C(R500+G500+B1000)
 Light source: full-color RGB laser/W2000mW, Power consumption: 35W
 Scanning system: precision micro gear motor, Modulation signal: analog signal (PWM signal)
 Control Mode: DMX512, self-propelled, randomized, Control interface: three-core DMX512 interface
 DMX channel: 8CH, Electronic control technology: intelligent temperature control system, DMX512 upgrade
 Product features: full-color fireflies (multi-color changes), high brightness, light-emitting angle of 70°
 Application places: disco, ballroom, bar, KTV box, family PARTY
 Working temperature: 0-35°C, Light body size: 22cm*18cm*10cm
 Packing size(1pcs): 28cm*25cm*16cm Packing size(4pcs): 53cm*30cm*36cm
 Packing size(8pcs): 59cm*53cm*37cm Net weight: 2.5KG
 Gross weight(1pcs): 2.8KG Gross weight(4pcs): 12KG
 Gross weight(8pcs): 25.5KG

YD004 / YD005
5W/10W RGB Animation Laser
(2W/5W/8W/10W/15W/20W/30W Optional)



Light source brand: Nichia (Japan original import) , 5W light source proportioning power:
 Red: 1.5W@638nm Green: 1W@520nm Blue: 2.5W@450nm
 10W light source proportioning power: Red: 3W@638nm, Green: 3W@520nm, Blue: 4W@450nm
 Power supply voltage: 110-240v; 50/60 Hz, Laser color: full color, Angle of divergence: <1.5mrad
 Modulation mode: analog modulation / TTL modulation Beam angle: Max50°
 Vibrator speed: 20K Laser performance: text / pattern / animation / beam / LOGO/
 Heat dissipation mode: air-cooled Lens reflectivity: > 99, Software control: American Pangolin (QS)
 Operating temperature: -20-45 deg;
 Control options: ILDA standard / voice control / self-propelled / DMX512 / master-slave
 Light body size: 29cm * 25cm * 22cm Packing size(1pcs): 34cm * 26cm * 32cm
 Packing size(2pcs): 53cm*36cm*34cm Net weight: 5.5KG
 Gross weight(1pcs): 6.5KG Gross weight(2pcs): 14KG

YD014
Outdoor 40W RGB Animation Landmark Laser
(20W 30W 40W 50W 60W Optional)



Product Name: 40 watt full color animation laser light, Light source brand: Nichia (Japan original import)
 Light source proportioning power: Red: 12W@638nm Green: 14W@520nm Blue: 14W@450nm
 Supply voltage: 110-240v; 50/60 Hz Laser color: full color Angle of divergence: <1.5mrad
 Modulation mode: analog modulation / TTL modulation Beam angle: Max60°
 Vibrator speed: 30K
 Laser show: text/pattern/animation/beam/logo/Heat dissipation mode: air-cooled
 Lens reflectivity: > 99 Software control: American Pangolin (QS)
 Operating temperature: -20-45 deg;
 Control options: ILDA standard / voice-activated / self-propelled / DMX512 / master-slave
 Product size: 47cm*44cm*50cm
 Flight case packing size: 57cm*57cm*66cm
 Net weight: 36KG Gross weight: 55KG

YB001
150W LED Mini Beam



Input voltage: AC90V-220V 50Hz -60 Hz , Rated power: 150W
 Light source: 100W white light + 18pcs RGB flexible light strip
 Color plate: 7 colors + white light, with rainbow effect
 Moving gobo plate: 5 kinds of glass gobos+ white light,
 Prism: 3 prisms, positive and negative rotation with pattern, speed adjustable, self-rotating effect prisms
 Heat dissipation system: convection heat transfer, air-cooled, intelligent temperature control protection
 Lens: high precision coated optical lens set, Beam angle: 15 degrees, Dimming: 0-100% linear dimming
 Working mode: DMX512 signal / master-slave / self-propelled / voice-activated
 Control mode: international general DMX512, 14CH
 Panel display: 0.39-inch 4-bit digital tube + 4 keys, Scanning fine-tuning: 8/16Bit
 Scanning positioning: electronic automatic positioning, Net weight: 4.1KG
 Gross weight per unit: 4.7KG Gross weight(4pcs): 19.8KG
 Inner box size: 33*25*27CM Outer box size: 52*35*66CM Packing: 4pcs.

YB002
100W LED Mini Beam



Input voltage: AC90V-220V 50Hz -60 Hz Rated power: 150W
 Bead: 1pcs 100W LED light source Pattern plate: 7 gobos+ white light
 Color plate: 8 colors + white light White light color temperature: 7000K
 Prism: 1 cellular prism Control channel: 10CH Communication protocol: DMX512
 Control mode: voice control, self-propelled, master-slave, DMX,
 Control Panel: four digital display tube + keys Operating temperature: -25°C-45°C
 Dimming: 0-100% linear dimming
 Temperature system: intelligent temperature control system, monitoring
 and automatic temperature adjustment
 Shell Material: PC fire-resistant high temperature material
 Overall Dimension: 260*260*310mm IP Grade: IP20
 Net weight: 3KG Gross weight: 3.5KG
 Installation: Embedded installation Opening size: 22cm Depth: 18cm

YB004
150W LED Mini BSW



Input voltage: AC90V-220V 50Hz -60 Hz Rated power: 150W
 Light source: 120 W white light Gobo plate: 15 gobos
 Color plate: 10 colors Prism: 18 prisms
 Control mode: international general DMX512, 12 channels
 Working mode: DMX512, master/slave, self-propelled, voice control
 Dimming mode: 0-100% ultra-smooth dimming
 Strobe: 25 times / sec Opening size: 22cm depth 8cm
 Net weight of light: 4.55KG
 Gross weight per unit: 5.55KG
 Gross weight(4pcs): 23.325KG
 Inner box size: 37.27.5*29.5CM
 Outer box size: 57*39*62CM Packing: 4 units

YB005
LED Wash Spot Light



Power supply voltage: AC110-220V/50-60Hz, Control signal: DMX-512
 Lamp beads: 6pcs 25W RGBW lamp beads + 1pcs 80W high power white lamp beads
 Bead color: RGBW 4basic colors, Mode: Auto run, voice control, master-slave, DMX mode
 Operating angle: X-axis 360 degrees (optional 540 degrees), Y-axis 180 degrees
 Temperature system: Intelligent temperature control system,
 monitoring and automatically adjusting the temperature.
 Shell material: PC fireproof and high temperature resistant material
 Control panel: four digital display tube + 4 keys Working temperature: -25°C-45
 Scanning system: stepping motor Overall Dimension: 260*260*280mm
 Net weight: 2KG Gross weight: 3KG Installation: embedded installation
 Opening size: 22 Depth: 11

YB007
6 Bee Eyes RGBW Beam Laser



Input voltage: AC90V-220V 50Hz -60 Hz Rated power: 120W
 Lamp beads: 6pcs 15W CREE 4-in-1 lamp beads + 1pcs 100mW green laser
 + 24pcs 0.2W5050RGB flexible strip light
 Heat dissipation system: convection heat transfer, air-cooled, intelligent temperature control protection
 Lens: Unique clear and highly concentrated light, Strobe: 0-20 times/second
 Work mode: DMX512 signal / master-slave / self-propelled / voice-activated
 Control mode: international general DMX512, 16CH
 Panel display: 0.39-inch 4-bit digital tube + 4 keys
 Scanning speed: Horizontal 540° Vertical 180 speed adjustable
 Scanning fine-tuning: 8/16Bit scanning positioning: electronic automatic positioning
 Lamp net weight: 3.45KG Gross weight per unit: 4.15KG
 Gross weight(4pcs): 17.6KG Inner box size: 34*25*29CM
 Outer box size: 52*35*61CM Packing: 4 sets

YB006
6x20W LED RGBW Moving Beam



Input voltage: AC90V-220V 50Hz -60 Hz , Rated power: 150W
 Light source: 6 LED high brightness 20W RGBW
 Color: independent 4-color effect, unlimited color mixing combinations
 Cooling system: aluminum cooling, air-cooled, Lens: High precision optical lens set
 Beam angle: 2 degrees , Dimming: 0-100% linear dimming, Strobe: 0-20 times / sec
 Control mode: DMX512 signal / master-slave / synchronization, Panel display: 4-bit digital
 Channel: 18CH/35CH, Scanning angle: X-axis 540 ° , Y-axis 320 ° , Z-axis infinitely rotating
 Scanning fine-tuning: 8/16Bit
 Lamp net weight: 4.8KG Gross weight per unit: 5.7KG
 Gross weight per box: 11.7KG Inner box size: 33.5*23*32CM
 Outer box size: 49*35.5*34.5CM

YB008
Magic Ball Beam Strobe Laser



Input voltage: AC90V-220V 50Hz -60Hz , Rated power: 100W
 Light source: 4x3W red light, 4x3W green light, 4x3W blue light, 4x3W white light
 3x10W strobe, 3x30mW red/green/blue laser, 28pcs phantom color light band
 Heat dissipation system: convection heat transfer, air-cooled, Lens: high precision optical lens
 Beam angle: 4 degrees, Dimming: 0-100% linear dimming, Strobe: 0-20 times / sec
 Control mode: international general DMX512, 19/25 channels
 Work mode: DMX512, master/slave, self-propelled, voice-activated
 Panel display: 0.39-inch 4-bit digital tube + 4 keys
 Scanning speed: Horizontal 540 °, vertical 180 °, speed can be adjusted
 Scanning fine-tuning: 8/16Bit, Scanning positioning: electronic automatic positioning
 Color: 4 colors, combination with rainbow effect, Packed per box: 2 sets
 Product size: 225x175x420mm Inner box size: 48*30*25CM
 Outer box size: 50*31*53CM Net weight: 5.1KG
 Gross weight per unit: 6.18KG Gross weight per box: 13.2KG

YB009
6x40W RGBW LED Moving Beam



Input voltage: AC90V-220V 50Hz -60 Hz , Rated power: 240W
 Lamp beads: 6pcs 40W RGBW, Cooling system: aluminum heat dissipation, air-cooled
 Lens: High precision optical lens set, Beam angle: 2 ° Dimming: 0-100% linear dimming
 Strobe: 0-20 times / sec , Control mode: DMX512 / master-slave / synchronization
 Panel display: high-grade 1.77-inch color LCD screen
 Channel: 14CH/16CH
 Scanning speed: horizontal 540 °, vertical 340
 Scanning fine-tuning: 8/16Bit
 Color: independent of the 4-color effect, unlimited color mixing combinations.
 Net weight: 5.8KG, Gross weight per unit: 6.9KG
 Gross weight(2pcs): 14.7KG
 Inner box size: 36*28*42CM
 Outer box size: 58*38*44CM(2pcs)

YB039
7 Eyes RGBW Moving Beam Laser



Input voltage: AC90V-220V 50Hz -60 Hz Rated power: 120W
 Light source: 7x3W red, 7x3W green, 7x3W blue, 7x3W white,
 108pcs phantom 5050 light beads.
 50mW red laser, 50mW green laser, 50mW blue laser, 3pcs 10W white strobe light
 Cooling system: aluminum heat sink, air-cooled , Lens: high precision optical lens
 Beam angle: 2 degrees, Dimming: 0-100% linear dimming, Strobe: 0-20 times / sec
 Control mode: DMX512 signal/master-slave/synchronization
 Panel display: high-grade 1.77-inch color LCD screen, Channel: 19CH/25CH
 Scanning angle: X-axis 540 °, Y-axis 320 °, Z-axis infinite rotation
 Scanning fine-tuning: 8/16Bit
 Product size: 265x207x360mm
 Product weight: 5.85kg

YB037
6X10W LED RGBW Strobe Laser



Input voltage: AC90V-220V 50Hz -60 Hz , Rated power: 160W
 Light source: 6 10W CREE 4in1 lamp beads + 1x100MW red laser
 + 1x100MW green laser + 2x10W white strobe (third generation)
 Luminous color: color light Luminous degree: 40 ° bead surface
 Power connection: power cord Signal connection: signal input line / output line
 Control channel: international general DMX512, 15 signal channel
 Control mode: DMX-512, 15 signal control, voice control, self-propelled and master-slave mode
 Cooling system: fan forced cooling system Working environment: Indoor
 Packing: air box or carton
 Inner box size: 33*17*32CM
 Outer box size: 69*36*65CM
 Net weight: 5.1KG
 Gross weight: 5.35KG
 Gross weight(4pcs): 21.40KG

YB025B
4 Arms RGB Beam Laser



Power supply: AC95V-245V/50Hz Product power: 80W
 Lamp bead parameters: 4x15W CREE 4in1 lamp beads, a 100MW red laser ,
 a green laser, 2x5W gold light
 Strobe: 0-20 times / sec
 Work mode: DMX512 signal / master-slave / self-propelled / voice-activated
 Control mode: international general DMX512, 15CH, 21CH
 Panel display: 0.39-inch 4-bit digital tube + 4 keys
 Scanning speed: horizontal 540 ° , vertical 180 ° speed adjustable
 Z-axis rotation: 360 degrees infinitely rotatable
 Scanning fine-tuning: 8/16Bit Scanning positioning: electronic automatic positioning
 Net weight: 2.3KG Gross weight per unit: 2.9KG
 Gross weight per box: 12.25KG Inner box size: 27*27*20CM
 Outer box size: 56*29*43CM Packing: 4 units

YB038
12pcs RGBW Strobe Laser



Input voltage: AC90V-220V 50Hz -60 Hz
 Rated power: 120W
 Light source: 12pcs 4in1 RGBW, 2x30w white strobe,
 1x500mw single green laser rain. 1x200mw red laser
 Control mode: DMX512 / master-slave voice control
 / self-propelled X-axis infinitely rotating Y-axis can be turned 180 °
 Lifespan up to 80,000 hours
 Channel: 18/31/47 channels
 Net weight: 7kg
 Size: 30*30*16cm

YB023
LED 3 Arms Magic Ball Moving Beam Laser



Working voltage: AC95V-245V/50Hz Product power: 80W
 Light source: 4x3W red LED, 4x3W green LED, 4x3W blue lamp beads, 4x3W white LED
 50mW red laser, 50mW green laser, 50mW blue laser, 3x10W gold strobe light
 Control mode: international general DMX512, 20 channels
 Working mode: DMX512, master/slave, self-propelled, voice-activated
 Dimming mode: 0-100% ultra-smooth dimming
 Strobe: 20 times / sec
 Product size: 158x145x190mm
 Net weight: 1.8KG
 Gross weight per unit: 2.6KG
 Gross weight per box: 11.4KG
 Inner box size: 32*32*24CM
 Outer box size: 66*34*52CM

YB025
2 Arms RGBW Moving Beam Laser




Working voltage: AC95V-245V 50-60Hz
 Product power: 50W
 Lamp beads : 2x3W red lamp beads, 2x3W green lamp beads, 2x3W blue lamp beads,
 2x3W white lamp beads, 50mW red laser, 50mW green laser.
 1x15W 4-in-1 light beads, 12pcs colorful light strips
 Control mode: international general DMX512, 19 channels
 Working mode: DMX512, master/slave, self-propelled, voice control
 Dimming mode: 0-100% ultra-smooth dimming
 Strobe: 20 times / sec
 Product size: 240x128x153mm
 Net weight: 0.8kg

YB040
Mini RGB Moving Ball Laser



Input voltage: AC90V-220V 50Hz -60 Hz Rated power: 80W
 Pattern lamp beads: 1x45W white light Strobe light bead: 1x20W white light
 Pattern: 8 gobos Color palette: 7 colors
 Green laser: 1x520nm green laser
 Red laser: 1x650nm red laser
 Control mode: international general DMX512
 Working mode: DMX512 signal / master-slave / self-propelled / voice control
 Remote control: wireless 433M HZ
 Net weight 0.75KG
 Gross weight per unit: 0.95KG
 Gross weight per box: 12.4KG
 Inner box size: 16*16*17.5CM
 Outer box size: 50*33*36.5CM
 Packing: 12 units

YB043/YB044
Mini RGB Strobe A/B



Input voltage: AC90V-220V 50Hz -60 Hz Rated power: 100W
 Light source: 288x0.2W 5050RGB (288x 0.2W RGB+48x 0.5W white)
 Mode: DMX512, self-propelled, master-slave, voice-activated, RDM
 Channel: 8CH(11CH)
 Dimming: 32bit 0-100% linear dimming
 Operating temperature: -30°C -50°C
 Strobe frequency: 0-30HZ
 Connection: DMX512
 Net weight: 0.55KG
 Gross weight per unit: 0.9KG
 Gross weight per box: 18.9KG
 Inner box size: 54*38*37CM
 Outer box size: 16.4*7.3*17.5CM
 Packing: 20 units

YB020
Butterfly laser 3in1/4in1



Laser: 500MW green light/150MW red light
 Lamp bead: LED four in one RGBW 2x10W
 Input voltage: AC110/240V 50-60Hz
 Rated power: 50W
 Strobe LED: 20W white light
 Control: DMX512, Voice control, master-slave, self-propelled
 Function: Dot matrix effect, dynamic music
 Net weight of lamp: 1.4KG Gross weight per unit: 1.75kg
 Gross weight per box: 15.2KG Inner box size: 26 * 25 * 21CM
 Outer box size: 55 * 52 * 45CM Each box contains 8 units

YB011
Rotating Starry Sky Laser



Input voltage: AC90V-220V 50Hz -60 Hz Rated power: 80W
 Lamp bead parameters: 6 x10W 4in1 + 1x50MW green laser
 Control mode: DMX512, master/slave, self-propelled, voice-activated
 Channel: 9CH Dimming mode: 0-100% ultra-smooth regulation
 Strobe: 20 times / sec Lamp body size: diameter 25CM, height 17.5CM
 Opening size 23CM
 Single package size: 27*27*23CM
 A pack of four packaging: 57 * 29 * 50CM
 Light body weight: 1.95KG
 One package weight: 2.5KG
 Four packaging weight: 10.5KG

YB024
LED RGB Laser



AC voltage: AC100-240V, 50/60Hz
 Total power: 24W
 Red laser: 19 + 2 red laser 650nm
 Green laser: 2 green laser 520nm
 Blue laser: 2 blue laser 450nm
 Working mode: DMX512 signal/master-slave/self-propelled/sound control
 Lamp net weight: 1.1KG
 Gross weight per unit: 1.55KG
 Gross weight per box: 14KG
 Inner box size: 27*26*22CM
 Outer box size: 56*54*48CM
 Packing: 8 sets

YB048
LED Magic Ball Laser



Input voltage: AC90V-220V 50Hz -60 Hz
 Rated power: 50W
 Lamp bead parameters: 4x3W lamp beads, 2x100mW red laser,
 2x100mW green laser, 2x10W golden yellow light strobe
 2x100mW green laser, 2x10W gold light strobe
 Control mode: international general DMX512, 14 channels
 Work mode: DMX512, master/slave, self-propelled, voice-activated
 Dimming mode: 0-100% ultra-smooth dimming
 Strobe: 20 times / sec
 Product size: 200x255x196mm
 Net weight: 1.46kg

YB046
Mushroom Laser V2.0



Input voltage: AC90V-220V 50Hz -60 Hz Rated power: 60W
 Beads: 5x50mW red laser, 4x50mW green laser, 1pcs blue laser; 48pcs 5050 beads
 Control international: DMX512, 12 (or 24) channel
 Operation mode: DMX512, master/slave, self-propelled, voice-activated
 Dimming mode: 0-100% ultra-smooth dimming
 Strobe: 20 times / sec
 Heat dissipation: aluminum cooling, forced cooling fan
 Net weight: 1.85KG
 Gross weight per unit: 2.45KG
 Gross weight per box: 10.7KG
 Inner box size: 26*26*35CM
 Outer box size: 55*28*54CM
 Packing: 4 sets

YB033
Mini 2W/3W RGB Animation Laser



Input voltage: AC90V-220V 50Hz -60 Hz Rated power: 2000MW
 Light source: Green 500MW/520nm, Red: 500MW/638nm Blue: 1000MW/445nm
 Playback system: DMX512, voice-activated, automatic,
 Control system: High-speed galvanometer; Scanning angle ± 20 °
 Effect: show the beam effect in three-dimensional space, enhance spatial imagination,
 give people a real feeling; can play a kaleidoscope
 Dozens of three-dimensional graphics, such as cylinders, program rich dynamic
 Control interface: DMX512 (12 control channels)
 Net weight: 3KG Gross weight per unit: 3.7KG
 Gross weight per box: 16.7KG Inner box size: 26 * 24 * 23CM
 Outer box size: 54 * 30 * 48CM
 Packing: 4 sets

YB032 / YB033
1W/60MW RGB Animation Laser




Input voltage: AC90V-220V 50Hz -60 Hz Rated power: 1000MW
 Light source: green 100mw, red 300mw, blue 600mw
 Playback system: DMX512, sound control, automatic,
 Control system: high-speed galvanometer; scanning angle ± 20 °
 Program effects: in three-dimensional space to show the effect of light beams,
 enhance the spatial imagination, give people a real feeling; can play a kaleidoscope
 Cylinders and other dozens of three-dimensional graphics, the program is rich in dynamics
 Control interface: DMX512 (12 control channels)
 Net weight: 2KG Gross weight per unit: 2.4KG
 Gross weight per box: 15.3KG Inner box size: 29 * 25 * 16CM
 Outer box size: 53 * 31 * 54CM Packing: 6 sets

YB026
LED 4+5 Moving Laser Bar



Input voltage: AC90V-220V 50Hz -60 Hz
 Rated power: >50W
 Laser: Semiconductor pumped all-solid-state laser
 Laser power: red laser (638nm)/500mw*4
 LED's single power: 5W
 Number of LEDs: 5 single point control
 Laser: 4 single point control
 Laser Model: 500MW
 Gross weight per box: 4.75KG
 Gross weight per box: 19.8KG
 Inner table size: 68*16*20CM
 Outer box size: 70*35*44CM
 Packing: 4 sets

YB019
RGB 3in1 LED Butterfly Laser



Voltage: AC110/240V 50-60Hz
 Laser: 500MW green light/150MW red light
 Beads: LED 4in1 RGBW 2x10W
 Power: 50W
 Strobe bead: 20W white light
 Control: DMX512, voice control, master-slave, self-propelled
 Function: Dot matrix effect, music dynamic

YB018
6x10W 4in1 Bee Eyes Laser



Working voltage: AC220V/50Hz
Product power: 80W
Bead parameters: 6x10W four-in-one and 1x50mW green laser
Control mode: international general DMX512, 9 channels
Working mode: DMX512, master/slave, self-propelled, voice control
Dimming mode: 0-100% ultra-smooth dimming
Strobe: 20 times / sec
Opening size: 20cm Depth: 18cm

YB016/YB017
Embedded 24x3W/54x3W LED RGB Par



Working voltage: AC110-240V/50Hz
Product power: 80W/180W
Lamp beads parameters: 24x3W/54 RGBW monochrome 3W
Control mode: international general DMX512, 6 channels
Working mode: DMX512, master/slave, self-propelled, voice control
Dimming mode: 0-100% super smooth dimming
Strobe: 25 times / sec
Opening size: 20cm
Depth: 18cm

YB014
Embedded LED COB Par



Input voltage: AC90V-220V 50Hz -60 Hz Rated power: 150W
Light source: 100W LED lamp beads
(color temperature optional: warm white /cool white/or two-in-one)
Control mode: International DMX512/4CH
Working mode: DMX512, master-slave, self-propelled, voice control
Self-propelled, voice control
Dimming mode: 0-100% super smooth dimming
Strobe: 25 times per second
Net weight: 1.3KG
Gross weight per box: 9.05KG
Outer box size: 57*29*50CM
Hole Size: 20cm depth 18cm
Gross weight per unit: 2.05KG
Inner box size: 27*27*23CM
Packing: 4 sets

YB015
Embedded 1W RGB Animation Laser



Input voltage: AC90V-220V 50Hz -60 Hz Rated power: 1000MW
Power: Green 100mw, Red 300mw, Blue 600mw
Playback system: DMX512, sound control, automatic
Control system: high-speed galvanometer; scanning angle ± 20°
Program effects: in three-dimensional space to show the effect of light beams, enhance spatial imagination, give people a real feeling; can play a kaleidoscope
Cylinders and other dozens of three-dimensional graphics, the program is rich in dynamics
Control interface: DMX512 (12 control channels)
Hole size: 20cm Depth: 18cm
Net weight: 1.2KG
Gross weight per unit: 1.95KG
Gross weight per box: 8.6KG
Inner box size: 27*27*23CM
Outer box size: 57*29*50CM
Packing: 4 units

YB034
Intelligent Light Controller System



Input voltage: AC90V-220V 50Hz -60 Hz
RS232, TTL communication protocol; support, for different brands of jukebox communication docking linkage
AC220V output port: L N (fire line zero line input at the same time)
AC220V output port: 3KW * 5 for ordinary chandelier lighting
Lighting scenes: 32; each lighting scene step 9999, about 6-7 minutes
Center controller: built-in, wall plate control, Panel direct connection; support
Exhaust fan interface: 1pc Service light interface: 1
Shaker sensor light interface: 1 Built-in: 200W12V power supply
DMX strip light decoder: built-in; ordinary 7-color, IC pixel strip light
Support: TT console light tuning, computer analog console tuning
DMX512: maximum 512 channels Digital display: English characters

YK005
Sunny 512 Stage Light Controller



Input voltage: AC90-220V 50-60Hz Rated power: 100W
Channels: DMX512/1990 standard, 512 DMX control channels.
2 independent output drive ports with optical isolation, with 2000VDC electrical shock resistance.
Can control 32 sets of 16-channel computer lights
Large LCD screen with backlight to display various operating parameters
16 channel faders, 1 speed control fader
1600 walking light program step storage capacity
48 walking light programs, each program up to 100 steps
Individual setting of each step's speed and gradient parameters
Optional music synchronization or manual speed control
Product size: 49 cm * 40 cm * 10 cm
Package Size: 57 cm * 50 cm * 24 cm
Net weight: 5.5 KG
Gross Weight: 7.5 KG

YK002B
1024 Kingkong Stage Light Controller



Input voltage: AC90-220V 50-60Hz Rated power: 200W
DMX512/1990 standard, maximum 1024 DMX control channels, two opto-isolated signal outputs
Maximum control of 96 computer lights or 96 road dimming
The use of pearl light bank (R20 format light bank), and the console can write their own light bank
LCD display with backlight, the first Chinese and English display can be switched to the interface,
the panel in English optional, built-in graphics track generator
There are 128 built-in graphics, convenient for users to control the computer lights graphic track,
such as drawing circles, spirals, colors, rainbows, chases and other effects.
Rainbow, chase and other effects
Graphic parameters (such as: amplitude, speed, interval, wave, direction) can be set independently,
more convenient and quick to make the desired shape and scene
5 graphics can be saved for each scene; 10 graphics can be run at the same time
60 clips can be stored, and 60 reenactments can be stored for multi-step and single-step scenes.
Up to 600 single steps per multi-step scene; 10 reenactment scenes can be output and run at the same time
With 10 centralized faders, key point control and fader centralized control are compatible.
Supports the functions of address code reassignment, vertical and horizontal exchange, channel output reversal, etc.
Data can be memorized in case of power off or sudden power failure.
U disk can backup console data, and support re-imported into the console to use, the same type of console
data can be shared. Support remote software upgrade, add new features anytime, anywhere.
Preset pushbuttons can control the attributes of the computer lights; attribute control is more convenient and
quicker. Support immediate black field, professional gooseneck work lights (optional), suitable for indoor and
outdoor performances.
Lamp body size: 50 cm * 48 cm * 22cm, Package Size: 60 cm * 55 cm * 31cm, N.W.: 10.5 KG, G.W.: 15 KG

YK007
Quartz Tiger Lighting Console



Input voltage: AC90-220V 50-60Hz Rated power: 200W
i5 quad-generation processor Kingston 60G solid state disk, 4G running memory, 90 minutes ups power supply
Support Chinese menu display, and built-in multi-language; the use of U.S. imports of encoders
Built-in 4 DMX output ports, 2048 channels; (DMX output seat using the original Swiss twisted gram seat)
Support graffiti handwriting naming function, Built-in pixel mapping and graphics generator
Folder Chineseization function, Chinese and English can be switched at will
Supports Art-net network output, expandable to 12 Universe DMX outputs via network.
Supports Titan-net protocol, scalable to 64 Universe DMX outputs over network
10 mechanical page replay faders; 20 customizable macro buttons.
Expandable with a Titan Fader wing (playback auxiliary stage, 20 playback faders, 30 custom macros,
USB powered), Headphone output support
1 Gigabit network interface, supports Art-net, Titan-net, Streaming CAN protocols
Compatible with other TITAN system console performance files
Lamp body size: 50 cm * 48 cm * 22 cm Package size: 60 cm * 55 cm * 31 cm
Net weight: 10.6 KG Gross Weight: 14.5 KG

YK020
Tiger Touch Console



Input voltage: AC90-220V 50-60Hz, Rated power: 200W, Adopt powerful i5 motherboard
Intel dual-core processor, 128GB SSD, 8G RAM, Support Chinese menu display, built-in multi-language;
Built-in 15.6-inch high resolution widescreen touch screen (industrial screen), the
Support networking to computer devices to control a variety of lighting 3D visualization software;
10 macro function buttons, allows you to operate the console faster;
20 replay faders, support more than 1000 program replay;
Powerful attribute control window, CMYRGB color picker system;
The console comes with 8 DMX outputs, support for expansion to 64 DMX, and support for graffiti
screen logo function; Fast and easy to use graphics generator, classification of built-in graphics easier
to use; Support CIP protocol, you can see the image thumbnails of media clips in the media server
directly on the console; Support Wi-Fi access; wireless light control, mobile devices (iPhone, iPad
Touch) remote control lamps; Built-in thousands of light banks, built-in light bank editing software,
you can always program light banks on the console; Built-in Visualiser line lighting visualization software,
want to pre-program? No problem! Support MIDI time code sound and light synchronization function,
you can also play music in the console to send time code to control the light program replay.
Console interface: Input voltage: AC90-220V power input interface with power switch;
Standard DMX-512 interface; USB2.0 interface; 4/8 three interfaces can be selected one;
MIDI input and output interface: 15-pin serial interface 1, can be connected to the printer, etc. ;
Ethernet network interface 1 pc; Gooseneck light interface 1; One standard color VGA interface;
One reset button; One audio input, output and microphone interface;
One FireWire interface (power supply interface); Spare USB interface a
Lamp body size: 70 cm * 44cm * 16 cm, Package size: 77 cm * 65 cm * 33 cm, N.W.: 14 KG, G.W.: 19 KG

YK028

MA2 Controller(System Version)

Input voltage: AC90-220V 50-60Hz, Rated power: 200W, Professional Linux operating system
 Built-in 2 electric lift 15.4-inch industrial full view touch screen, 1 9-inch industrial full view touch screen
 Asus motherboard, powerful i5 CPU, 4G RAM, built-in SSD, 2 Geforce graphics cards
 6 DMX output ports, 1 composite DMX input port (can be set to output), and NPU connection can support up to 65536 channels
 15 motorized playback faders (60mm) with sensors, 50 program buttons
 An external fader wing can be connected to expand 4 DMX outputs, 15 faders and 30 program keys.
 1 total control fader, 2 A/B field manual faders (100mm)
 6 imported industrial grade wear-resistant encoders (with Push function), 1 dimmer wheel
 1 controllable XY axis high-precision original imported track ball
 2 Gigabit network port, support MA NET, ARTNET, ETC NET2, PATHPORT, SCAN, SHOWNET, KINET1 signals
 5 USB ports, 1 backup USB access port, 2 work light interfaces, 2 DVI interfaces, expandable by two displays
 MIDI I/O, LTC/SMPTE timecode, audio I/O, microphone I/O
 Built-in push-pull professional yellow bakelite mechanical keyboard (backlight brightness adjustable)
 Built-in 1 drawer, Yellow bakelite mechanical keys (adjustable backlight brightness)
 Wide voltage industrial power supply 100V-240V 50/60Hz
 Built-in high power UPS uninterruptible power supply, Support RDM function
 Size: 94cm*66cm*21cm Size of air box: 100cm*87cm*34cm Net weight: 42kg Gross weight: 75kg

YK030

MA Controller

Input voltage: AC90-220V 50-60Hz, Rated power: 450W
 Built-in UPS uninterruptible power supply, 0 delay automatic switching, undervoltage, overvoltage protection function, UPS special high-density maintenance-free lithium batteries
 Motherboard: ASUS motherboard, discrete CPU, 120GB Kingston Hacker solid state drive
 4GB Kingston memory, Control settings: 1 main control dimmer wheel
 4 attribute coding wheels (integrated key functions): 1 master fader (60mm manual)
 2 AB faders (100mm manual): 21 program playback faders (60mm manual)
 42 program memory function keys: two 19" widescreen touch displays
 Full-specification command key area: keyboard and mouse attached to the air box
 Interfaces: 2 USB 3.0 ports (Type A); 4 USB 2.0 ports (Type B)
 1 backup USB input port (Type B); 1 audio input port
 1 stereo output connector: 1 LTC input connector
 6 DMX-512 output connectors
 1 DMX-512 input connector (composite output function); 2 work light connectors
 1 Gigabit network interface: 1 MIDI input interface

YK013A

8 Channel DMX Signal Amplifier

Input voltage: AC90-220V 50-60Hz, Rated power: 100W
 Each way is an independent transformer power supply and eight optically isolated signal amplifiers to expand DMX.
 1 way DMX512 digital input, 1 way DMX512 direct output, input/output optical isolation
 8-channel optically isolated signal distribution output
 Electrical isolation voltage between each input and output connector: >1000V digital signal indicator
 DMX signal input connector: XLR-D3M /XLR-D5M
 DMX signal pass-through output connector: XLR-D3F/XLR-D5F
 DMX Signal Distribution Output Connector: XLR-D3F x 4 /XLR-D5F
 The amplification function allows the connection to be extended beyond the standard DMX512 length.
 Multiple amplifiers can be used on the same connection if additional positions are required.
 Each connection position can be independently connected to up to 32 fixtures.
 Lightweight design and rugged construction reduces recurrence of problems.
 Multiple DMX post stages share a common control system.
 Fixture size: 48 cm*16 cm*6 cm Pack of 5 Dimensions: 55 cm*22 cm*46 cm
 Net weight: 3 KG Gross weight: 16 KG

YK018B/YK017

12x4000W Power Distribution Box

Input voltage: AC90-220V 50-60Hz Rated power: 100W
 Power supply: three-phase five-wire system AC380V ± 10%
 Frequency: 50Hz ± 5%
 Rated power: 12 Channel x4KW;
 two 10A plugs for each channel, can be applied to any load.
 Overload and short circuit.
 Double protection high breaking air switch
 Input terminals or 160A Connie plugs.
 A.B.C three-phase working indicator.
 With two-legged and three-legged universal spare socket for easy use, can directly access the stage 4KW conventional lamps 12 or 4KW computer moving head lights 12;
 12-channel individual control
 Lamp body size: 49 cm*47 cm*13 cm
 Package size: 57 cm*57 cm* 18cm
 Net weight: 10 KG Gross weight: 12.5 KG

YK008

24 Channel Power Distribution Box

Input voltage: AC90-220V
 Frequency: 50-60Hz
 Rated power: 100W
 Power supply: three-phase five-wire AC380V ± 10%, frequency 50Hz ± 5%.
 Input rated current: 400A rhinoceros plug input, the maximum 24 road x 4KW
 Optional can be used for any load.
 With 225A main switch, overload and short-circuit double protection high intermittent air switches
 Three-phase independent voltage, current, monitoring, three-phase A.B.C indicator lights.
 Three kinds of output mode can be selected: 40A glue wood plug, 16A waterproof plug, 19 core plug.
 Dimensions: international standard 9U 13U 14U

YK021

8 Channel Extender

Input voltage: AC90-220V 50-60Hz Rated power: 100W
 Network signal: ART NET /TCP IP Number of signal channels: 8 DMX512 outputs and inputs.
 Working voltage: AC 100V-240V 47/60HZ Weight: Gross weight 2.08KG Net weight 2.3KG
 Function Characteristics:
 The software is self-developed, not a copy of the software. CPU adopts advanced ARM Cortex-m4.
 Each output signal is independently photoelectrically isolated, and the isolated power supply is 2000V DC.
 Support all ART NET network protocol consoles, such as Pearl Expert, Touch Tiger, MA, Flying Pig, etc.
 Convert regular DMX512 signals into ART NET signals.
 Signal output XLR mounts are original Swiss NEUTRIK 3-pole mounts (5-pole mounts are optional).
 Firmware can be upgraded via USB flash disk or network.
 System parameters can be set via LCD screen or network.
 Aluminum alloy brushed shell, standard 1U 19-inch rack mounting
 Light body size: 48 cm* 13cm*5 cm Package size: 57 cm*16 cm*8 cm
 Net Weight: 1.7 KG Gross Weight: 2.3 KG

YK003/YK004

Light Show Intelligent Control Host A/B

Input voltage: AC90-220V 50-60Hz Rated power: 100W
 Open programming console, Chinese operation interface, interactive control structure;
 High sensitivity 7-inch capacitive touch screen;
 Built-in 2-channel USB2.0 interface, can be connected to the mouse, keyboard, U disk, etc., convenient operation
 Built-in 2-channel Gigabit network port, can be connected to the network,
 to realize the third-party tools wired or wireless connection;
 ART-NET signals, which can also be converted to DMX512 input and output at the same time;
 Built-in 4-channel DMX512 ports, totaling 2048 channels;
 Network expansion can be added to expand up to 16 DMX512 ports
 Support wall control panel, cell phone, IPAD and other third-party tools for a variety of channels to control;
 Can record programs and control effects directly from the host panel.
 Support free switching between host mode and console mode;
 Can set the running time of power on/off in advance;
 Supporting the ability to run programs directly after automatic power-on;
 Supporting the ability to run a specified program after power on;
 Built-in program list, support customized naming. Support synchronized light/music playback;
 One-key SHOW playback, ultimate simplicity design; Perfect scene overlay and transitions;
 Support point control show mode; Support USB upgrade, upload MP3, load and backup data;
 Application areas: intelligent banquet halls, party rooms, building sand table, multi-functional studio, cultural and tourism landscape, outdoor lighting, music bar and multi-functional conference halls and other places
 Lamp body size: 49 cm*41 cm*14 cm, Package Size: 57 cm* 54cm*25 cm, N.W.: 6.6 KG, G.W.: 10 KG

YK027

NPU

Input voltage: AC90-220V 50-60Hz
 Rated power: 100W
 Intel i5 4590 processor, 4Gb RAM, Kingston 120G SSD system hard drive
 Real-time calculation, can simultaneously control up to 4,096 control parameters
 Comes with 8 DMX512 output ports
 Built-in 17-inch TFT touch screen display
 UPS without external power supply work for one hour If you need more time can be customized
 Customizable 220V power on automatic power 220V power off delay one minute automatic shutdown
 No need for manual operation, to facilitate the operation process of engineering
 equipment running back and forth in the server room
 Built-in 4-port Gigabit network switch
 2 USB 2.0 connectors
 2 quick power plugs cascade to reduce excessive power cords
 Standard 4U size can be on the cabinet



What We Offer

Design expertise

Installation & programming

Show pre-visualization

Pre-visualization

Free shipping

2-year warranty

Empower Your Vision



Fast • Safe • Reliable

Why Choose Us?



OEM factory-direct pricing



Precision color calibration



Modular, upgradeable design



Comprehensive global warranty



24/7 technical & software support